



WXTEAM

One platform – Up to every challenge




ROMEX

Weller®

Table of Contents

WXTeam	2 – 3
WX Soldering stations	4 – 5
WXD Desoldering stations	6 – 7
WXA Hot-air stations	8 – 9
WXR Rework station	10 – 11
Traceability	12 – 13
WX Tool selection	14 – 15
WX Compatible tools	16 – 17

Sets overview

WXR WXD WXA WX Sets	18 – 19
---------------------------	---------

WXR WXD WXA WX Compatible soldering iron	
WXMP Micro soldering iron RT RT MSTips	20 – 21
WXMT Micro desoldering tweezers RTW RTW MSTips	22
WXP 65 Soldering iron XNT XNT HSTips	23 – 24
WXP 120 Soldering iron XTips	25 – 26
WXP 200 Soldering iron XHTTips	27

WXD Compatible desoldering iron	
WXDP 120 WXDV 120 Desoldering iron	27 – 28

XDSL Extractor nozzle series	28
------------------------------	----

WXA Compatible hot-air pencil	
WXHAP 200 Hot-air pencil Hot-air nozzles (type F) + (type R)	29
Hot-air nozzles (type D) + (type Q)	30

WXR WXD WXA WX Compatible tools	
Zero Smog 4V Zero Smog 6V Zero Smog 20T	
fume extractors	31
WHP 1000 WHP 3000 Pre-heat plates	31
WXHP 120 Pre-heat plate	32
WXSb 200 Solder bath	32
WX Adapter WX Accessories	32
WX Stations for use with automatic soldering machines	33

Technical data

WX 1 Soldering station WX 2 Soldering station	
WXD 2 Desoldering	34 – 35
WXA 2 Hot-air station WXR 3 Rework station	34 – 35

OUR WX TEAM

Five pros – any challenge.



OUR WX TEAM

The five specialists from the Weller WXTeam will solve all your problems to do with soldering, desoldering and the use of hot-air in your manufacturing process. The entire WX team offers full WX tool compatibility, tried-and-tested benchtop functions and all essential traceability features.



OUR WX TEAM



WXA 2



Safe manual soldering

Weller WX stations make the manual soldering process safer, a crucial factor in the automobile, aerospace and medical technology industries. This is guaranteed by temperature and tool locking, and tool-specific temperature settings.



Use as benchtop controller

Integrated USB ports allow WX stations to be connected to and to control soldering fume extractors, pre-heat plates and programmable logic controllers (PLC). The connected tools feed back their parameters and status to the display.



Intelligent tool detection

All connected tools and accessories are detected automatically by the stations and their name(s) shown on the display.




Multifunctional USB port

Firmware updates and registration are quick and easy using USB sticks. User-friendly PC interface.



Integrated parameter memory

Parameters such as standby temperatures and automatic switch-off time can easily be stored in the soldering iron. Parameters only need to be stored once; the soldering iron can then use them with any WX station.



Maximum safety, maximum flexibility

A unique equipotential bonding connection is provided free of charge. The jack sleeve has 4 possible settings: hard earthed, equipotential bonding, floating and soft earthed.



ESD safe

All WX devices are ESD-safe and can be used in EPA regions.



Huge energy savings Usage sensor

Thanks to an integrated sensor, WX tools are motion activated. This means that they consume power only when they are actually in use. Connected accessories also go into standby mode.



Traceability

All WX stations are traceable and can be integrated into an existing traceability process.



Extremely short learning curve

Multi-language menu guide: German, English, French, Italian, Spanish, Portuguese and Mandarin. Other languages can be implemented on request.



Robot output

A digital, optically decoupled robot connection comes as standard.

WX SOLDERING STATION

A new era of soldering.

TWO STATIONS – MANY ADVANTAGES

The powerful, user-friendly WX 1 and WX 2 Soldering stations have redefined the world of soldering. Maximum process reliability for manual soldering tasks is guaranteed for the automobile, aerospace and medical technology industries. Any soldering process can be programmed easily using these intelligent tools, and a unique level of dependability assured. Whatever technique is used, these devices are intuitive and easy to operate thanks to their touch screens and language options. There is a choice between 1-channel and 2-channel stations.



LAURA & SAM THE MIGHTY TWINS

Laura and Sam are the founding members and reliable service providers in the WXTeam. Their outstanding performance, unique appeal and intuitive handling have largely defined the WX Character.



OUR WXTEAM



WX 1



NS

WX 2



ADVANTAGES AT A GLANCE




Visual process control through LED signal function

Blue LED ring light (light is out = Off, light is blinking = Standby or Heating Up, light is on = tip ready for use)



Tailor-made performance

Weller heating technologies deliver precise performance on demand.



Quick heating time

WX soldering irons heat in ultra-quick time and can be used immediately.

± 2 °C

Temperature stability/accuracy

All WX Soldering tools have a temperature stability of ± 2° C and a temperature accuracy of ± 9° C, as per IPC standard.



Intuitive operation

The robust touch screen is a capacitive touch panel made of real glass. It is anti-static and temperature-resistant. The turn-and-click wheel with confirm button allows intuitive operation.



Huge energy savings Motion sensor

Thanks to an integrated sensor, WX tools are motion activated. This means that they consume power only when they are actually in use. Connected accessories also go into standby mode.



WX soldering station Compatibility



Soldering

WXP 65 Soldering iron
WXP 120 Soldering iron
WXP 200 Soldering iron
WXMP Micro soldering iron
WXMT Micro desoldering iron tweezers
WXMP MS Micro soldering iron
WXMT MS Micro desoldering tweezers



Accessories

WHP 1000 Pre-heating plate
WHP 3000 Pre-heating plate
WXHP 120 Pre-heating plate
WXSB 200 Solder bath



Solder fume extractors

Zero Smog 4V
Zero Smog 6V
Zero Smog 20T

WXD 2 DESOLDERING

Remove solder with the fastest desoldering irons in the world.



DAVE THE VACUUM MAN

Nothing stays around long when Dave's on the job. He clears the area in no time and leaves the surface ready for new jobs. All by himself!



OUR WTEAM



THIS DESOLDERING SYSTEM IS IN A LEAGUE OF ITS OWN!

With the 2-channel soldering station and WXD 2 Desoldering station, plus the high-power WXPDP 120 Desoldering iron, you can tackle jobs you hardly thought possible. With a heating time of 35 seconds, the WXPDP 120 Desoldering iron sets new standards for high-performance soldering and desoldering.


STATION

ADVANTAGES AT A GLANCE



External compressed air supply

The maintenance-free Venturi unit produces a constant vacuum via an external compressed air supply. A separate compressed air supply is needed.



Fastest desoldering iron

With its 120 Watts and extremely short heating time, the desoldering iron can easily handle jobs that would have been difficult in the past, including desoldering high mass PCBs.



No tedious cleaning

The new, extended nozzle shaft prevents the suction tube sticking. Since the suction channel has also been replaced, the once tedious and time-consuming task of cleaning the tool is now a thing of the past.



Quick replacement

Thanks to ingenious mountings, the suction nozzle and solder cartridge can be changed quickly and easily – without the risk of burning or tricky replacement work.



Huge cost savings

The relatively low operating temperature (380°C) and automatic standby mode controlled by the use sensor increase the service life of the suction nozzles by a factor of 3.



User-friendly handling

An ergonomically-shaped Softgrip handle with integrated finger switch makes for efficient operation. The short distance between the solder cartridge and the Softgrip handle prevents the tool from twisting while held in the hand.



Vacuum run-on

A vacuum run-on time can be set to prevent the suction pump blocking.



2 models are available.

The WXPDP 120 is designed for horizontal operation and the WXDPV 120 for vertical operation.



**WXD 2 Desoldering station
Compatibility**



Soldering

WXP 65 Soldering iron
WXP 120 Soldering iron
WXP 200 Soldering iron
WXMP Micro soldering iron
WXMT Micro desoldering iron tweezers
WXMP MS Micro soldering iron
WXMT MS Micro desoldering tweezers



Desoldering

WXDP 120 Desoldering iron
WXDV 120 Desoldering iron



Accessories

WHP 1000 Pre-heating plate
WHP 3000 Pre-heating plate
WXHP 120 Pre-heating plate
WXSB 200 Solder bath



Solder fume extractors

Zero Smog 4V
Zero Smog 6V
Zero Smog 20T

WXA 2 HOT-AIR STATION

The perfect solution for hot-air and soldering jobs.



ALEX HIS AIRNESS

The elegant player in the WXTeam is "His Airness". He gently handles the finest jobs but is also extremely forceful when necessary. He moves between these extremes with ultimate ease. A real grandee in the team!



OUR WXTTEAM



HOT-AIR AND SOLDERING IN A SINGLE STATION.

Clear handling advantages and tangible cost savings in one unit. That's what you get with the WXA 2 hot-air station. Ideal for complex hot-air jobs or traditional soldering. The hot-air amount (20 l/min, at 6 bar) is infinitely adjustable. And of course the entire range of high-performance hot-air and soldering accessories is compatible with this station.

ADVANTAGES AT A GLANCE



Adjustable air amount

The amount of air can be controlled using the rotary knob. An external compressed air supply is needed. The amount of air is displayed in percent.



Adjustable operating mode

The unit has 3 separate operating modes.

Operating mode level 1 – the air flow continues for as long as the button on the hot-air iron or foot switch is pressed.

Operating mode level 2 – if the button is pressed once, the hot-air flow continues for between 0 and 300 seconds, stopping at the end of the set time.

Operating mode level 3 – the WXHAP 200 switches on with one press of the button and off with the second press.



Finger and foot switches

The air flow is controlled using the finger switch in the handle. It can also be controlled by a foot switch (optional).



Maximum flexibility

The comprehensive nozzle selection makes the WXHAP 200 Hot-air soldering pencil suitable for a wide range of applications. Flat and round nozzles, dual and quad nozzles.



Ion trap

All WX devices are ESD-safe and can be used in EPA regions. The ion trap in the iron ensures that the emerging hot-air is free of static electricity.



Inert gas operation

An inert gas (nitrogen) can also be used for challenging soldering jobs to generate the hot-air.



WXA 2 Hot-air station
Maximum flexibility



Soldering

WXP 65 Soldering iron
WXP 120 Soldering iron
WXP 200 Soldering iron
WXMP Micro soldering iron
WXMT Micro desoldering iron/tweezers
WXMP MS Micro soldering iron
WXMT MS Micro desoldering tweezers



Hot-air

WXHAP 200 Hot-air soldering pencil



Accessories

WHP 1000 Pre-heating plate
WHP 3000 Pre-heating plate
WXHP 120 Pre-heating plate
WXSB 200 Solder bath



Solder fume extractors

Zero Smog 4V
Zero Smog 6V
Zero Smog 20T



WXR 3 REWORK STATION

Everything – and more.



ROB THE REWORKER

Rob is the all-rounder in the team. No matter where you put it, he always brings full power and impresses with its flexibility and simplicity, so one need any successful team.



OUR WX TEAM



WXR 3 REWORK STATION

The WXR 3 Rework station is the perfect solution for all soldering, desoldering and hot-air jobs. The WXR 3 can handle the most demanding tasks but is also ideal for standard jobs. All units can cope with major manufacturing tasks quickly and surely thanks to their straight-forward settings. The station can also be integrated into a traceability process.

ADVANTAGES AT A GLANCE



600 Watts – unique

The WXR 3 is a 3-channel station with a total output of 600 W. The multifunctional WXR 3 is suitable for all applications, and can take all WXTools.



2 integrated pumps (self-contained)

2 integrated pumps make the system independent of a separate compressed air supply. A high-performance pump for vacuum and hot-air, and a separate vacuum pump for pick-up tools.



User-friendliness

The LCD display shows all connected tools. Special functions can easily be set at the press of a button.



WRK reflow kit

For soldering and desoldering of large SMT components up to 30 x 30 mm.




WVP vacuum pipette

Move components simply and safely. Housing is antistatic.



Automatic / intelligent power management

The rework station provides 600 Watts of power. Its intelligent power management function allows the available power to be distributed to the connected tools as required – a total of 600 Watts. High-performance tools can be operated at the same time. 3 channels, 200 Watts each.

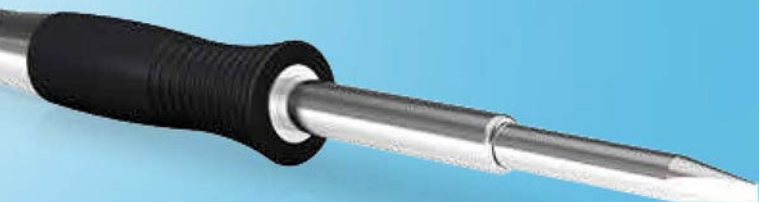

WXR 3 Rework station Compatibility



Soldering

WXP 65 Soldering iron
WXP 120 Soldering iron
WXP 200 Soldering iron
WXMP Micro soldering iron
WXMT Micro desoldering iron tweezers
WXMP MS Micro soldering iron
WXMT MS Micro desoldering tweezers



Desoldering

WXDP 120 Desoldering iron
WXDV 120 Desoldering iron



Hot-air

WXHAP 200 Hot-air soldering pencil



Accessories

WHP 1000 Pre-heating plate
WHP 3000 Pre-heating plate
WXHP 120 Pre-heating plate
WXSb 200 Solder bath
WRK Reflow set
WVP Vacuum pipette



Solder fume extractors

Zero Smog 4V
Zero Smog 6V
Zero Smog 20T


TRACEABILITY

Traceable Process Control.

The following workflow diagram depicts a serial number with bar code integrated PCB production using the Weller WX station. The workflow includes the interactivity of the operator and the dialog of the Traceability System with the WX-Station.

TRACEABILITY WORKFLOW

CUSTOMER

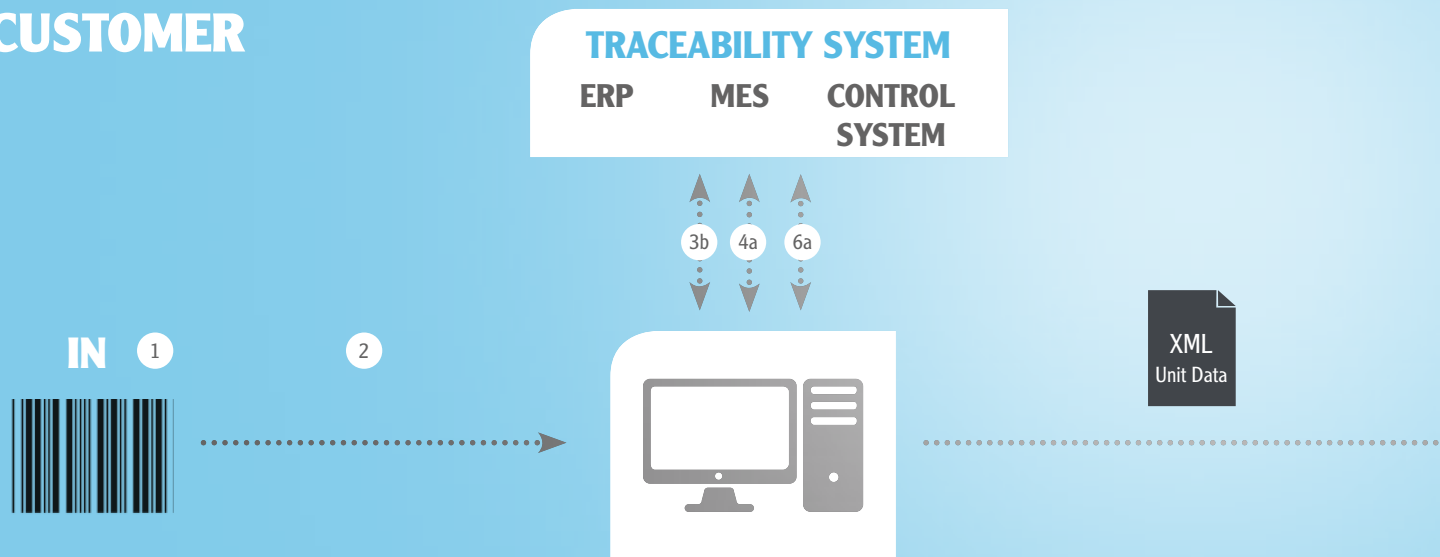

WELLER





1. Begin processing of product:
Scan PCB or product to be soldered.

2. Transmission of data to the Traceability System.

3.a. Prepare WX station: the Traceability System delivers process parameter selection data.



3.b. Parameterization of the WX station
Process parameter lock out: Auto tool temperature set and lock out.



4.a. Optional Control: Process control:
Error or O.K.

4.b. Visual process control via Weller LED ring light on the iron.

5. Begin soldering of product with
WX station (Equipment).

6.a. Monitor during soldering process:
Success control.

6.b. unitData: Transmission of soldering
process data. (XML-File).

unit Data

OUT








WX TOOL SELECTION



OUR WX TEAM

	Tools
 Page 23	WXP 65 65 W Soldering iron T005 29 212 99 (Set)
 Page 25	WXP 120 120 W Soldering iron T005 29 202 99 (Set)
 Page 27	WXP 200 200 W Soldering iron T005 29 206 99 (Set)
 Page 20	WXMP 40 W (55 W mit RT 11) Micro soldering iron T005 29 204 99 (Set)
 Page 22	WXMT 2 x 40 W Micro desoldering tweezers T005 13 178 99 (Set)
 Page 27	WXDP 120 120 W Desoldering iron T005 13 202 99 (Set)
 Page 28	WXDV 120 120 W Desoldering iron T005 13 205 99 (Set)
 Page 29	WXHAP 200 200 W Hot-air iron T005 27 120 99 (Set)
 Seite 11	WRK Reflowset T005 15 155 99
 Page 11	WVP Vacuum pick-Up T005 29 184 99
 Page 31	WHP 1000 1000 W Preheating plate T005 33 648 99
 Page 31	WHP 3000 600 W Infrared preheating plate T005 33 386 99
 Page 31	WHP 3000 1200 W Infrared preheating plate T005 33 646 99
 Page 32	WXHP 120 120 W Preheating plate T005 27 029 99
 Page 32	WXSB 200 200 W Soldering bath T005 27 043 99
 Page 31	Zero Smog 4V Mobile fume extraction unit for up to 4 workplaces T005 36 606 99
 Page 31	Zero Smog 6V Mobile fume extraction unit for up to 6 workplaces T005 36 666 99
 Page 31	Zero Smog 20T Mobile fume extraction unit for up to 20 FE-Soldering irons T005 36 706 99

AN OVERVIEW OF THE ALLOCATION OF **WX TOOLS**

WX 1 T005 34 176 99 200 W (255 W)	WX 2 T005 34 206 99 200 W (255 W)	WXd 2 T005 34 266 99 200 W (255 W)	WXA 2 T005 34 256 99 200 W (255 W)	WXR 3 T00 5 35 006 99 420 W (600 W)
				
Soldering power unit with 1 channel	Soldering power unit with 2 channels	Desoldering power unit with 2 channels	Hot-air power unit with 2 channels	Rework power unit with 3 channels
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
-	-	+	-	+
-	-	+	-	+
-	-	-	+	+
-	-	-	-	+
-	-	-	-	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+
+	+	+	+	+



WX COMPATIBLE TOOLS



WXP 65, 65 W

Small fast soldering iron with 65 watts. Qualified for fine solder jobs with high heating demand. Power response heating element technology.



WXP 120, 120 W

Allrounder with 120 watts. For soldering applications from small to large components with high temperature demand. Power response heating element technology.



WXP 200, 200 W

High power soldering iron. Ideal for applications with a high temperature demand, e.g. LED backpanels or HF shieldings. Power response heating element technology.



WXMP, 40 W

Fine line soldering iron. Ideal for microscop work. High performance by integrated active soldering tip. Active tip heating element technology.



WXMT, 2 x 40 W

Slim tweezers. Ideal for soldering and desoldering of very small SMD components. Active tip heating element technology.



WXDP 120, 120 W

High Power desoldering iron. Heat-up time 35 sec. only. It makes the most difficult desoldering challenge easy. Integrated solder collector – for horizontal handling.



WXDV 120, 120 W

High Power desoldering iron. Heat-up time 35 sec. only. It makes the most difficult desoldering challenge easy. Integrated solder collector – for vertical handling.



WXHAP 200, 200 W

Hot-air iron for soldering SMD devices. The integrated ion trap allows an ionic free air flow.



WHP 1000, 1000 W

Preheating plate, heating surface 220 x 150 mm.



WHP 3000, 600 W

Infrared preheating plate, heating surface 190 x 120 mm.



WHP 3000, 1200 W

Infrared preheating plate, heating surface 245 x 190 mm.



WXHP 120, 120 W

Preheating plate, 120 W with 30 % more heat output, for multilayer applications and high mass circuit boards, heating surface 80 x 50 mm.



WXSB 200, 200 W

Soldering bath for preparing of strands.



Zero Smog 4V

Mobile fume extraction unit for up to 4 work places.



Zero Smog 6V

Mobile fume extraction unit for up to 6 work places.



Zero Smog 20T

Mobile fume extraction unit for tip extraction for up to 20 work places.

Overview WX Sets



WXR Rework stations



WXR 3030 Set

WXR 3 Power unit with WXHAP 200 Hot-air iron (200 W / 24 V), WXDP 120 Desoldering iron for horizontal use (120 W / 24 V), WXP 65 Soldering iron (65 W / 24 V), WVP Vacuum Pick-Up, PDN Pliers Desoldering Nozzle, WDH 30, WDH 70, WDH 10 Safety rests



Power Response

Order no.
T005 35 016 99



WXR 3031 Set

WXR 3 Power unit with WXHAP 200 Hot-air iron (200 W / 24 V), WXDP 120 Desoldering iron (120 W / 24 V), WXP 120 Soldering iron (120 W / 24 V), WVP Vacuum Pick-Up, PDN Pliers Desoldering Nozzle, WDH 30, WDH 70, WDH 10 Safety rests



Power Response

Order no.
T005 35 026 99



WXR 3032 Set

WXR 3 Power unit with WXHAP 200 Hot-air iron (200 W / 24 V), WXDV 120 Desoldering iron for vertical use (120 W / 24 V), WXP 65 Soldering iron (65 W / 24 V), WVP Vacuum Pick-Up, PDN Pliers Desoldering Nozzle, WDH 30, WDH 70, WDH 10 Safety rests



Power Response

Order no.
T005 35 036 99



WXD Desoldering stations



WXD 2010 Set

WXD 2 Power unit, WXDP 120 High-Power Desoldering iron (120 W / 24 V), WDH 70 Safety rest and PDN Pliers Desoldering Nozzle

Order no.
T005 34 286 99
T005 34 283 99 (UK)



WXD 2020 Set

WXD 2 Power unit, WXDP 120 High-Power Desoldering iron (120 W / 24 V) and WDH 70 Safety rest, WXP 120 Soldering iron with WDH 10 Safety rest and PDN Pliers Desoldering Nozzle



Power Response

Order no.
T005 34 296 99
T005 34 293 99 (UK)



WXA Hot-air station



WXA 2010 Set

WXA 2 Hot-air power unit, WXHAP 200 (200 W / 24 V) Hot-air iron and WDH 30 Safety rest

Order no.
T005 34 306 99
T005 34 303 99 (UK)



WX Soldering stations



WX 1010 Set

WX 1 Power unit with WXP 120 Soldering iron (120 W / 24 V) and WDH 10 Safety rest



Power Response
Order no.
T005 34 186 99
T005 34 183 99 (UK)



WX 1011 Set

WX 1 Power unit with WXMP Soldering iron (55 W / 12 V) and WDH 51 Safety rest



Active Tip
Order no.
T005 34 196 99
T005 34 193 99 (UK)



WX 1012 Set

WX 1 Power unit with WXP 65 Soldering iron (65 W / 24 V) and WDH 10 Safety rest



Power Response
Order no.
T005 34 276 99
T005 34 273 99 (UK)



WX 2020 Set

WX 2 Power unit with 2 x WXP 120 Soldering irons (120 W / 24 V) and 2 WDH 10 Safety rests



Power Response
Order no.
T005 34 216 99
T005 34 213 99 (UK)



WX 2021 Set

WX 2 Power unit with WXMP Micro soldering iron (55 W / 12 V) and WDH 51 Safety rests, WXMT Micro desoldering tweezers (2 x 40 W / 12 V) and WDH 60 Safety rest



Active Tip
Order no.
T005 34 226 99
T005 34 223 99 (UK)

Weller offers the best tools for every soldering challenge.
No soldering tip calibration required.



Maximum




- Fast and easy tip change
- Exceptionally short heat up time
- Energy saving with standby function
- Excellent response time




















WXMP Micro soldering iron set with WDH 51 Safety rest

Ideal for delicate and temperature sensitive applications and for use under a microscope; uses ultra fine tips with fastest heat response and best temperature-control; cartridge tips. 40 W, 12 V (55 W with RT 11) | Max. temperature 450°C | Order no. T005 29 204 99

Chisel





RT	a mm	b mm	Order no.
RT 1SC 	0.4	0.15	T005 44 612 99
RT 1SCNW* 	0.3	0.1	T005 44 626 99
RT 3 	1.3	0.4	T005 44 603 99
RT 4 	1.5	0.4	T005 44 604 99
RT 8 	2.2	0.4	T005 44 608 99
RT 9 	0.8	0.4	T005 44 609 99
RT 11 	3.6	0.9	T005 44 611 99
RT 5 30° 	0.8	0.4	T005 44 605 99

RT MS	a mm	b mm	Order no.
RT 1SCMS 	0.4	0.15	T005 44 615 99
RT 1SCNWMS* 	0.3	0.1	T005 44 626 71
RT 3MS 	1.3	0.4	T005 44 616 99
RT 4MS 	1.5	0.4	T005 44 618 99
RT 8MS 	2.2	0.4	T005 44 622 99
RT 9MS 	0.8	0.4	T005 44 623 99
RT 11MS 	3.6	0.9	T005 44 631 99
RT 5MS 30° 	0.8	0.4	T005 44 619 99
RT 3XMS 30° 	1.3	0.5	T005 44 603 73

Sloped



Type	a mm	Order no.
RT 6 45° 	1.2	T005 44 606 99

Type	a mm	Order no.
RT 6MS 45° 	1.2	T005 44 620 99

* Unwetttable

MS tips: separately grounded

Conical



Type	Ø a mm	Order no.
RT 1	0.2	T005 44 601 99
RT 1NW*	0.1	T005 44 625 99
RT 2	0.8	T005 44 602 99

Type	Ø a mm	Order no.
RT 1MS	0.2	T005 44 614 99
RT 1NWMS*	0.1	T005 44 625 71
RT 2MS	0.8	T005 44 617 99
RT 12MS 25°	0.5	T005 44 632 99
RT 13MS 30°	0.4	T005 44 633 99

Gull wing



Type	a mm	b mm	Order no.
RT 10GW	1.2	2.0	T005 44 610 99

Type	Ø a mm	b mm	Order no.
RT 10GWMS	1.2	2.0	T005 44 624 99

Knife



Type	Ø a mm	Order no.
RT 7 45°	2.2	T005 44 607 99

Type	Ø a mm	Order no.
RT 7MS 45°	2.2	T005 44 621 99

MS tips: separately grounded

Measuring tip

Type	Order no.
RT Measuring tip	T005 44 613 99

MS Handles and MS Soldering tips have to be used together.
MS Soldering tips are for use with MS Handles only (WXMP MS / WMRP MS).
MS Tips are separately grounded.

MS Handles for RT MS Soldering tips:
T005 29 213 99 WXMP MS Soldering iron handle packed
T005 29 217 99 WXMP MS Soldering iron with WDH 51 Safety rest
T005 29 192 99 WMRP MS Soldering iron handle packed




- Fast and easy tip change
- Exceptionally short heat up time
- Energy saving with standby function
- Excellent response time

WXMT Micro desoldering tweezers set with tweezers tips RTW 2 and WDH 60 Safety rest

Slim tweezers. Ideal for soldering and desoldering very small SMD components.

2 x 40 W | 12 V | Max. temperature 450°C | Order no. T005 29 204 99

Chisel



RTW	Ø a mm	b mm	Order no.
RTW 2 45°	0.7	0.4	T005 44 652 99
RTW 3 45°	3.0	1.0	T005 44 653 99
RTW 4 45°	6.0	1.0	T005 44 654 99
RTW 9	3.0	1.0	T005 44 666 99
RTW 11	6.0	1.0	T005 44 667 99
RTW 10	10.0	1.0	T005 44 668 99
RTW 8	1.3	0.4	T005 44 664 99

RTW MS	Ø a mm	b mm	Order no.
RTW 2MS45°	0.7	0.4	T005 44 657 99
RTW 3MS 45°	3.0	1.0	T005 44 658 99
RTW 4MS 45°	6.0	1.0	T005 44 659 99
RTW 9MS	3.0	1.0	T005 44 669 99
RTW 11MS	6.0	1.0	T005 44 670 99
RTW 10MS	10.0	1.0	T005 44 671 99
RTW 8MS	1.3	0.4	T005 44 665 99
RTW 7NWMS*	0.8	0.4	T005 44 663 71

Conical



Type	Ø a mm	Order no.
RTW 1 45°	0.4	T005 44 651 99
RTW 6NW* 45°	0.2	T005 44 656 99

Type	Ø a mm	Order no.
RTW 1MS 45°	0.4	T005 44 655 99
RTW 6NWMS* 45°	0.2	T005 44 656 71

* Unwetttable

MS tips: separately grounded

MS Handles and MS Soldering tips have to be used together.
MS Soldering tips are for use with MS Handles only (WXMP MS / WMRP MS).
MS Tips are separately grounded.

MS Handles for RT MS Soldering tips:

T005 13 179 99 WXMP MS Soldering iron handle packed
T005 13 203 99 WXMP MS Soldering iron with WDH 60 Safety rest
T005 13 175 99 WMRP MS Soldering iron handle packed




- Low price interchangeable soldering tips
- Maximum heat transfer
- Improved heater sensor positioning
- Short recovery time



WXP 65 Soldering iron set with WDH 10 Safety rest

Small fast soldering iron. Suitable for fine soldering jobs with a high heat demand.
65 W | 24 V | Max. temperature 450°C | Order no. T005 29 212 99

Chisel



XNT	Ø a mm	b mm	c mm	Order no.
XNT 1SCNW*	0.3	0.1	27.0	T005 44 881 99 T005 44 881 10
XNT 1SC	0.4	0.15	27.0	T005 44 862 99 T005 44 862 10
XNT H	0.8	0.4	28.0	T005 44 859 99 T005 44 859 10
XNT K	1.2	0.4	28.0	T005 44 860 99 T005 44 860 10
XNT A	1.6	0.4	28.0	T005 44 851 99 T005 44 851 10
XNT 6	1.6	0.4	29.5	T005 44 856 99 T005 44 856 10
XNT B	2.4	0.8	27.0	T005 44 857 99 T005 44 857 10

Type	Ø a mm	b mm	c mm	Order no.
XNT C	3.2	0.8	27.0	T005 44 858 99 T005 44 858 10
XNT D	4.0	0.8	28.0	T005 44 853 99 T005 44 853 10
XNT HX 45°	0.8	0.4	36.5	T005 44 873 99 T005 44 873 10
XNT 4X 45°	1.2	0.4	34.6	T005 44 874 99 T005 44 874 10
XNT AX	1.6	0.8	28.0	T005 44 864 99 T005 44 864 10
XNT BX	2.4	0.8	36.5	T005 44 882 99 T005 44 882 10
XNT MX	3.2	0.8	37.5	T005 44 883 99 T005 44 883 10

Sloped



Type	a mm	Order no.
XNT 4	1.2	T005 44 855 99 T005 44 855 10
XNT AA 45°	1.6	T005 44 884 99 T005 44 884 10
XNT BB 45°	2.4	T005 44 885 99 T005 44 885 10

Type	a mm	Order no.
XNT CC 45°	3.2	T005 44 886 99 T005 44 886 10
XNT F 45°	1.2	T005 44 887 99 T005 44 887 10


Conical



Type	Ø a mm	c mm	Order no.
XNT 1	0.5	27.0	T005 44 850 99 T005 44 850 10

Type	Ø a mm	c mm	Order no.
XNT S	0.4	37.5	T005 44 868 99 T005 44 868 10

Knife






Type	Ø a mm	c mm	Order no.
XNT KN	2.0	33.0	T005 44 863 99 T005 44 863 10

* Unwetttable


Packaging unit
 ■ T005 XX XXX 99 = 1 piece
 ■ T005 XX XXX 10 = 10 piece
 ■ T005 XX XXX 11 = 100 piece



Gull wing





XNT	b mm	c mm	Order no.
XNT GW 1 	2.0	33.0	T005 44 854 99 T005 44 854 10
XNT GW 2 	1.5	27.5	T005 44 880 99 T005 44 880 10



Round




Type	Ø a mm	c mm	Order no.
XNT 1S 	0.2	28.5	T005 44 852 99 T005 44 852 10
XNT 1LX 	0.2		T005 44 872 99 T005 44 872 10

Type	Ø a mm	c mm	Order no.
XNT 1X 	0.4	28.0	T005 44 865 99 T005 44 865 10
XNT 1SLX 45° 	0.4	39.5	T005 44 875 99 T005 44 875 10









SMT









Type	Ø a mm	b mm	c mm	Order no.
XNT SMT 01 	10.4	0.6	7.1	T005 44 876 99
XNT SMT 02 	16.8	0.6	7.1	T005 44 877 99

Type	Ø a mm	b mm	c mm	Order no.
XNT SMT 03 	20.8	0.6	7.1	T005 44 878 99



Highspeed





Type	Ø a mm	b mm	c mm	Order no.
XNT 1 HS 	0.5		27.0	T005 44 888 99 T005 44 888 10
XNT 1S HS 	0.2		28.5	T005 44 889 99 T005 44 889 10
XNT 4 HS 	1.2			T005 44 890 99 T005 44 890 10
XNT 6 HS 	1.6	0.4	29.5	T005 44 891 99 T005 44 891 10
XNT H HS 	0.8	0.4	28.0	T005 44 892 99 T005 44 892 10
XNT K HS 	1.2	0.4	28.0	T005 44 893 99 T005 44 893 10
XNT AX HS 	1.6	0.8	28.0	T005 44 894 99 T005 44 894 10
XNT 1X HS 	0.4		28.0	T005 44 895 99 T005 44 895 10

Type	Ø a mm	b mm	c mm	Order no.
XNT S HS 	0.4			T005 44 896 99 T005 44 896 10
XNT AS HS 	1.6			T005 44 897 99 T005 44 897 10
XNT 1L HS 	0.2			T005 44 898 99 T005 44 898 10
XNT 1LX HS 	0.2			T005 44 899 99 T005 44 899 10
XNT HX HS 30° 	0.8	0.4	36.5	T005 44 900 99 T005 44 900 10
XNT 4X HS 45° 	1.2	0.4	34.6	T005 44 901 99 T005 44 901 10
XNT 1SLX HS 45° 	0.4		39.5	T005 44 902 99 T005 44 902 10
XNT F HS45° 	1.2			T005 44 903 99 T005 44 903 10

Accessories

Type	Ø a mm	c mm	Order no.
Measuring tip 	0.6	31.3	T005 44 861 99
XNT Screw M4 		26.0	T005 44 879 99

Type	Order no.
Barrel 	T005 87 657 58
Barrel for bent tips 	T005 87 657 67




- Low price interchangeable soldering tips
- Maximum heat transfer
- Improved heater sensor positioning
- Short recovery time

WXP 120 Soldering iron set with WDH 10 Safety rest

Excellent all-round 120 Watts ion. Suitable for use on small and large components within applications with a higher heat demand.
120 W | 24 V | Max. temperature 450°C | Order no. T005 29 202 99


Chisel



XT	Ø a mm	b mm	c mm	Order no.
XT H	0.8	0.4	36.5	T005 44 713 99 T005 44 713 10
XT A	1.6	0.7	36.5	T005 44 703 99 T005 44 703 10
XT AL	1.6	1.0	39.5	T005 44 701 99 T005 44 701 10
XT ASL	1.6	0.45	36.5	T005 44 740 99 T005 44 740 10
XT M	3.2	1.2	39.5	T005 44 702 99 T005 44 702 10
XT B	2.4	0.8	36.0	T005 44 704 99 T005 44 704 10
XT BSL	2.4	0.45	36.0	T005 44 741 99 T005 44 741 10
XT B SL	2.5	0.8	36.3	T005 44 738 99 T005 44 738 10
XT C	3.2	0.8	36.0	T005 44 705 99 T005 44 705 10

Type	Ø a mm	b mm	c mm	Order no.
XT D	4.6	0.8	34.5	T005 44 706 99 T005 44 706 10
XT CSL	3.2	0.45	36.0	T005 44 742 99 T005 44 742 10
XT E	5.9	1.2	34.5	T005 44 707 99 T005 44 707 10
XT DL	4.6	0.8	39.5	T005 44 736 99
XT MX	3.2	0.8	53.5	T005 44 745 99 T005 44 745 10
XT HX	0.8	0.4	51.5	T005 44 737 99
XT AX 30°	1.6	0.7	51.5	T005 44 743 99 T005 44 743 10
XT BX 30°	2.4	0.8	51.5	T005 44 744 99 T005 44 744 10


Round



Type	Ø a mm	c mm	Order no.
XT BS	2.4	36.5	T005 44 715 99 T005 44 715 10
XT CS	3.2	36.5	T005 44 716 99 T005 44 716 10

Type	Ø a mm	c mm	Order no.
XT DS	5.0	34.5	T005 44 717 99 T005 44 717 10

Sloped



Type	a mm	c mm	Order no.
XT F 30°	1.2	36.5	T005 44 718 99 T005 44 718 10
XT AA 60°	1.6	36.5	T005 44 708 99 T005 44 708 10
XT BB 45°	2.4	36.5	T005 44 709 99 T005 44 709 10

Type	a mm	c mm	Order no.
XT CC 45°	3.2	36.5	T005 44 710 99 T005 44 710 10
XT DDH 45°	4.0	40.5	T005 44 730 99 T005 44 730 10
XT AA 60°	1.6	36.5	T005 44 708 99 T005 44 708 10

Gull wing



XT	Ø a mm	b mm	c mm	Order no.
XT GW1	2.3	3.2	36.5	T005 44 712 99 T005 44 712 10
XT GW2	3.5	4.8	36.5	T005 44 735 99

Type	Ø a mm	b mm	c mm	Order no.
XT GW3	0.8	0.9	41.5	T005 44 739 99 T005 44 739 10

Knife



Type	Ø a mm	c mm	Order no.
XT KN 60 °	2.0	45.0	T005 44 711 99 T005 44 711 10

Conical



Type	Ø a mm	c mm	Order no.
XT 0	1.0	36.5	T005 44 714 99 T005 44 714 10

Soldering head

Type	a mm	b mm	Order no.
XT Soldering head	10.0	4.0	T005 44 731 99
Spare soldering head	10.0	4.0	T005 44 731 90
XT Soldering head	20.0	4.0	T005 44 732 99
Spare soldering head	20.0	4.0	T005 44 732 90
XT Soldering head	33.0	4.0	T005 44 733 99
Spare soldering head	33.0	4.0	T005 44 733 90

Accessories

Type	a mm	c mm	Order no.
XT Measuring tip	0.5	40.0	T005 44 722 99
XT Adapter M4 Galvanised ferrous coating		36.0	T005 44 719 99
XT Adapter M5 Galvanised ferrous coating		36.0	T005 44 720 99

Type	Order no.
Barrel	WXP 120 WP 120 T005 87 657 11 T005 87 637 09
Barrel for bent tips	WXP 120 WP 120 T005 87 657 66 T005 87 658 02

Packaging unit
 ■ T005 XX XXX 99 = 1 piece
 ■ T005 XX XXX 10 = 10 piece
 ■ T005 XX XXX 11 = 100 piece




- Low price interchangeable soldering tips
- Maximum heat transfer
- Improved heater sensor positioning
- Short recovery time



WXP 200 Soldering iron set with WDH 31 Safety rest

200 Watts high Power Soldering iron. Ideal for those applications with the highest heat demands e.g. LED backpanels or HF shieldings.
200 W | 24 V | Max. temperature 450°C | Order no. T005 29 206 99

Chisel



XHT	Ø a mm	b mm	c mm	Order no.
XHT C	3.2	1.2	48.0	T005 44 804 99
XHT D	5.0	1.2	48.0	T005 44 801 99

Type	Ø a mm	b mm	c mm	Order no.
XHT E	7.6	1.5	48.0	T005 44 802 99
XHT F	9.3	2.0	48.0	T005 44 805 99

Accessories

Type	a mm	b mm	c mm	Order no.
XHT Measuring Tip	1.25	6.0	55.0	T005 44 803 99
Barrel				T005 87 637 25

WXD and WXR Compatible tools



- Intelligent, programmable desoldering iron
- For use horizontally
- 35 sec. heat up time and set-back-function
- Push and Pull Technology¹⁾



WXDP 120 Desoldering iron set 120 W, with excenter fixture, with WDH 70 Safety rest and PDN Plier Desoldering Nozzle

The fastest desoldering iron, reaching operating temperature in 35 seconds, it makes the most difficult desoldering challenge easy.
Integrated solder collector – for horizontal handling.
120 W | 24 V | Max. temperature 450°C | Order no. T005 13 202 99

¹⁾ Push and Pull Technology: easy change of the tin collector by pliers for desoldering nozzle PDN



WX
compatible



- Intelligent, programmable desoldering iron
- For use vertically
- 35 sec. heat up time and set-back-function
- Push and Pull Technology¹⁾


WXDV 120 Desoldering iron set 120 W, with excenter fixture, with WDH 40 Safety rest and PDN Pliers Desoldering Nozzle

The fastest inline desoldering iron, reaching operating temperature in 35 seconds, it makes the most difficult desoldering challenge easy. Integrated solder collector – for vertical handling.

120 W | 24 V | Max. temperature 450°C | Order no. T005 13 205 99

¹⁾ Push and Pull Technology: easy change of the tin collector by plier for desoldering nozzle PDN



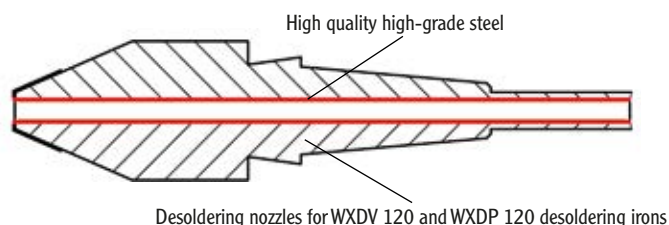





XDSL Series desoldering nozzles












- Longlife nozzles with extended lifetime
- Saving on cost of ownership of up to 27 %
- For WXDV 120 and WXPDP 120 Desoldering irons

The new XDSL series desoldering nozzles have an integrated steel tube which reduces cost of ownership. A high grade stainless steel tube is located inside the nozzle to prevent the erosion of the nozzle's copper body by molten solder and flux. This system results in a longer lifetime than with standard nozzles.

Desoldering nozzles XDSL Series

Type	Ø Inner mm	Ø Outer mm	Nozzle length mm	Order no.
XDSL 1 	1.4	2.5	10.5	T005 13 259 99 T005 13 259 10
XDSL 2 	3.0	5.3	10.5	T005 13 260 99 T005 13 260 10
XDSL 3 	1.0	2.3	10.5	T005 13 261 99 T005 13 261 10
XDSL 4 	1.2	2.5	10.5	T005 13 262 99 T005 13 262 10
XDSL 5 	1.8	3.3	10.5	T005 13 263 99 T005 13 263 10
XDSL 6 	0.7	1.9	16.5	T005 13 264 99 T005 13 264 10
XDSL 7 	1.2	2.7	16.5	T005 13 265 99 T005 13 265 10
XDSL 8 	1.5	2.9	10.5	T005 13 266 99 T005 13 266 10

Desoldering nozzles XDS Series

Type	Ø Inner mm	Ø Outer mm	Nozzle length mm	Order no.
XDS 1 	1.4	2.5	10.5	T005 13 250 99 T005 13 250 10
XDS 2 	3.0	5.3	10.5	T005 13 251 99 T005 13 251 10
XDS 3 	1.0	2.3	10.5	T005 13 252 99 T005 13 252 10
XDS 4 	1.2	2.5	10.5	T005 13 253 99 T005 13 253 10
XDS 5 	1.8	3.3	10.5	T005 13 254 99 T005 13 254 10
XDS 6 	0.7	1.9	16.5	T005 13 255 99 T005 13 255 10
XDS 7 	1.2	2.7	16.5	T005 13 256 99 T005 13 256 10
XDS 8 	1.5	2.9	10.5	T005 13 257 99 T005 13 257 10
XDS 9 	0.55	2.2	11.0	T005 13 258 99

WXA and WXR Compatible tools






- Extensive range of nozzles to meet every application need
- Powerful 200 Watts design for comfortable and precise operation
- Ideal for working on surface mounted components and suitable for EPA areas.















WXHAP 200 Hot-air iron set with WDH 30 Safety rest

Hot-air iron for soldering SMD devices. The integrated ion trap allows an ionic free air flow.
200 W | 24 V | Max. temperature 550°C | Order no. T005 27 120 99





Hot-air nozzles WXHAP 200 Flat nozzle (Typ F)

Type	Description	Width A mm	Width B mm	Order no.
	Adapter M6 for HAP 200			T005 87 617 28
F02 	Flat nozzle	8.0	1.5	T005 87 277 74
F04 	Flat nozzle	10.5	1.5	T005 87 277 73
F06 	Flat nozzle	12.0	1.5	T005 87 277 72







Hot-air nozzles WXHAP 200 Round nozzle (Typ R)

Type	Description	Ø mm	Distance C mm	Length C mm	Order no.
R02 	 Round nozzle	0.8			T005 87 278 23
R04 	 Round nozzle	1.2			T005 87 278 21
R06 	 Round nozzle	3.0			T005 87 278 22
R10 	 Round nozzle long	2.0		50	T005 87 277 87
R08 	 Round nozzle long bent	2.0		50	T005 87 277 86
FD2 	 Dual nozzle	1.5	8		T005 87 277 76
FD4 	 Dual nozzle	1.5	10		T005 87 277 75

Hot-air nozzle WXHAP 200
2 sides heated (type D,
length X = heated side)

Type		Description	Length X mm	Width Y mm	Order no.
D04		Adapter M6 for HAP 200	10.5	10.5	T005 87 277 79
D06		Flat nozzle	13.0	10.0	T005 87 277 82
D08		Flat nozzle	15.0	10.0	T005 87 277 81
D10		Flat nozzle	18.0	10.0	T005 87 277 84

Hot-air nozzle WXHAP 200
All 4 sides heated (type Q)

Type		Description	Length X mm	Width Y mm	Order no.
Q02		Hot-air nozzle 4 sides heated	6.0	6.5	T005 87 277 77
Q04		Hot-air nozzle 4 sides heated	6.0	9.0	T005 87 277 78
Q06		Hot-air nozzle 4 sides heated with pre-heating plate	15.0	10.0	T005 87 277 80
Q08		Hot-air nozzle 4 sides heated with pre-heating plate	12.5	15.0	T005 87 277 83
SK709		Hot-air nozzle 4 sides heated with pre-heating plate	12.0	12.0	T005 87 278 12
Q10		Hot-air nozzle 4 sides heated with pre-heating plate	18.0	18.0	T005 87 277 85
R01		Measuring nozzle for calibration			T005 87 278 08



WX Compatible fume extraction



Zero Smog 4V

Mobile fume extraction unit for large areas, with built-in turbine and pressure regulator for constant volume flow.
Up to for 4 work places.

Order no.
T005 36 606 99



Zero Smog 6V

Mobile fume extraction for large areas, with a built-in turbine.
Up to for 6 work places.

Order no.
T005 36 666 99



Zero Smog 20T

Mobile fume extraction for tip extraction at the soldering tip, with a built-in turbine.
Up to 20 FE-Soldering irons.

Order no.
T005 36 706 99



WX Compatible heating plates



WHP 1000

Preheating plate 1000 W | 230 V
Heated surface area: 220 x 150 mm

Order no.
T005 33 648 99



WHP 3000, 600 W

Infrared preheating plate 600 W | 230 V
With Easy-Fix-circuit board holder
Heated surface area: 120 x 190 mm

Order no.
T005 33 386 99



WHP 3000, 1200 W

Infrared preheating plate 1200 W | 230 V
With Easy-Fix-circuit board holder
Heated surface area: 190 x 245 mm

Order no.
T005 33 646 99

& WX Compatible heating plate



WXHP 120

Preheating plate 120 W | 24 V
Heated surface area: 80 x 50 mm

Order no.
T005 27 029 99

& WX Compatible soldering bath



WXSb 200

Soldering bath 200 W | 24 V
Soldering bath size: 58 x 33 x 19 mm

Order no.
T005 27 043 99

& WX Adapter / Accessories



WX Adapter for PC

Order no.
T005 87 647 11



WX Adapter for Zero Smog

Order no.
T005 87 647 12



WX Connection cable, 2 m

Order no.
T005 87 647 10



WX HUB for control of Zero Smog

Order no.
T005 87 647 26



WFV 60A Automatic butterfly valve

Order no.
T005 87 627 46



Foot switch WXA | WXD | WXR

Order no.
T005 87 647 46

& WX Compatible for use in solder robots



HERX 120 Heating element

Heating element 120 W | for solder robot application with WX 1 / WX 2

Order no.
T005 87 657 40

Cord for HERX 120

Cord for HERX 120 | 1.6 m

Order no.
T005 87 657 15

XTR Soldering tips for HERX 120

Type		Ø Width mm	Ø Thickness mm	Length mm	Order no.
XTR A		1.6	0.7	36.0	T005 44 723 99
XTR B		2.4	0.8	35.0	T005 44 724 99
XTR C		3.2	0.8	35.0	T005 44 725 99
XTR D		4.6	0.8	34.5	T005 44 726 99
XTR E		5.9	1.2	34.5	T005 44 727 99
XTR M		3.2	1.2	39.0	T005 44 728 99



Technical data



WX 1 Soldering power unit



WX 2 Soldering power unit



Dimensions L x W x H	170 x 151 x 130 mm (6.69 x 5.94 x 5.12 inch)	
Weight	ca. 3.2 kg	
Mains supply	230 V 50 Hz	
Power consumption	200 W	200 W (255 W)
Temperature range	Adjustable temperature range 50°C – 550°C (150°F – 999°F) Adjustable temperature range varies among tools	
Temperature accuracy	± 9°C (± 17°F)	
Temperature stability	± 2°C (± 4°F)	
Equipotential bonding	Via 3.5 mm pawl socket on back of device (normal state hard grounded)	
Material Touch Panel	Made of antistatic coated material (glas)	
Air flow rate	–	
Pressure	–	
Bleeder	Soldering tip (tip to ground) equal to IPC-J-001	
USB interface and RS 232 interface	yes	
Pump (Intermittent mode (30/30) s)	–	
Pump	–	
Order no.	T005 34 173 99	T005 34 203 99



WXD 2 Desoldering power unit



WXA 2 Hot-air power unit



WXR 3 Rework power unit



170 x 151 x 130 mm (6.69 x 5.94 x 5.12 inch)		273 x 235 x 102 mm (10.75 x 9.25 x 4.02 inch)
ca. 3.8 kg	ca. 3.8 kg	ca. 6.7 kg
230 V 50 Hz		230 V 50 Hz
200 W (255 W)		420 W (600 W)
Adjustable temperature range 50°C – 550°C (150°F – 999°F) Adjustable temperature range varies among tools		Adjustable temperature range 100°C – 550°C (200°F – 999°F) Adjustable temperature range varies among tools
± 9°C (± 17°F)	Hot-air iron ± 30°C (± 54°F) soldering iron ± 9°C (± 17°F)	± 9°C (± 17°F) (WXHAP 200 ± 30°C / ± 80°F)
± 2°C (± 4°F)		± 2°C (± 4°F)
Via 3.5 mm pawl socket on back of device (normal state hard grounded)		Via 3.5 mm pawl socket on back of device (normal state hard grounded)
Made of antistatic coated material (glas)		–
ca. 35 l / min	ca. 0 – 20 l / min.	–
Inlet pressure 400 – 600 kPa (58 – 87 psi), oil-free, dry compressed air	Inlet pressure, 400 kPa (58 psi), oil-free, dry compressed air or nitrogen (N ₂)	–
Soldering tip (tip to ground) equal to IPC-J-001		Soldering tip (tip to ground) equal to IPC-J-001
yes		yes
Venturi		Max. vacuum 0.7 bar, delivery rate 18 l / min, max. hot-air 15 l / min
–		Max. vacuum 0.5 bar, max. delivery rate 1.7 l / min
T005 34 263 99	T005 34 256 99	T05 35 006 99



For the BeNeLux countries contact:
Romex B.V.
Remmerden 5
3911 TZ Rhenen, Netherlands.
Phone: +31-(0)317298787
Fax: +31-(0)317398780
E-mail: info@romex.nl
Webshop: <http://www.romex.nl>

GERMANY

Weller Tools GmbH
Carl-Benz-Straße 2
74354 Besigheim

Tel: +49 (0)7143 580-0
Fax: +49 (0)7143 580-108

ITALY

Apex Tool S.r.l.
Viale Europa 80
20090 Cusago (MI)

Tel: +39 (02)9033101
Fax: +39 (02)90394231

USA

Apex Tool Group, LLC
1000 Lufkin Road
Apex, NC 27539-8160

Tel: +1 (800)476-3030 Ext.
Fax: +1 (800)387-2640

UNITED KINGDOM

Apex Tool Group (UK Operations) Ltd
4th Floor Pennine House
Washington, Tyne & Wear
NE37 1LY

Tel: +44 (0) 191 419 7700
Fax: +44 (0) 191 417 9421

SWITZERLAND

Apex Tool Switzerland Sàrl
Rue de la Roselière 12
1400 Yverdon-les-Bains

Tel: +41 (0) 24 426 12 06
Fax: +41 (0) 24 425 09 77

CANADA

Apex Tools – Canada
5925 McLaughlin Rd.
Mississauga, Ontario L5R 1B8

Tel: +1 (905) 501-4785
Fax: +1 (905) 501-4786

FRANCE

Apex Tool Group S.N.C.
25 Avenue Maurice Chevalier B.P. 46
77832 Ozoir-la-Ferrière Cedex

Tel: +33 (0) 1.64.43.22.00
Fax: +33 (0) 1.64.43.21.62

CHINA

Apex Tool Group
A-8 Building
No. 38 Dongsheng Road
Heqing Industrial Park, Pudong
Shanghai 201201

Tel: +86 (21)60880288
Fax: +86 (21)60880289

AUSTRALIA

Apex Tools Australia
P.O. Box 366
519 Nurigong Street
Albury, N.S.W. 2640

Tel: +61 (2)6058-0300
Fax: +61 (2)6021-7403

SOUTH EAST ASIA

Apex Power Tools India Pvt Ltd
Gala No. 1, Plot No. 5
S.No. 234, 235 & 245
India land Global Industrial Park.
(Next to Tata Johnson Control)
Taluka- Mulsi , Phase -I
Hinjawadi Pune (411057)
Maharashtra, India

toolsindia@apextoolgroup.com

Weller®