


VTAC

HSD Solutions

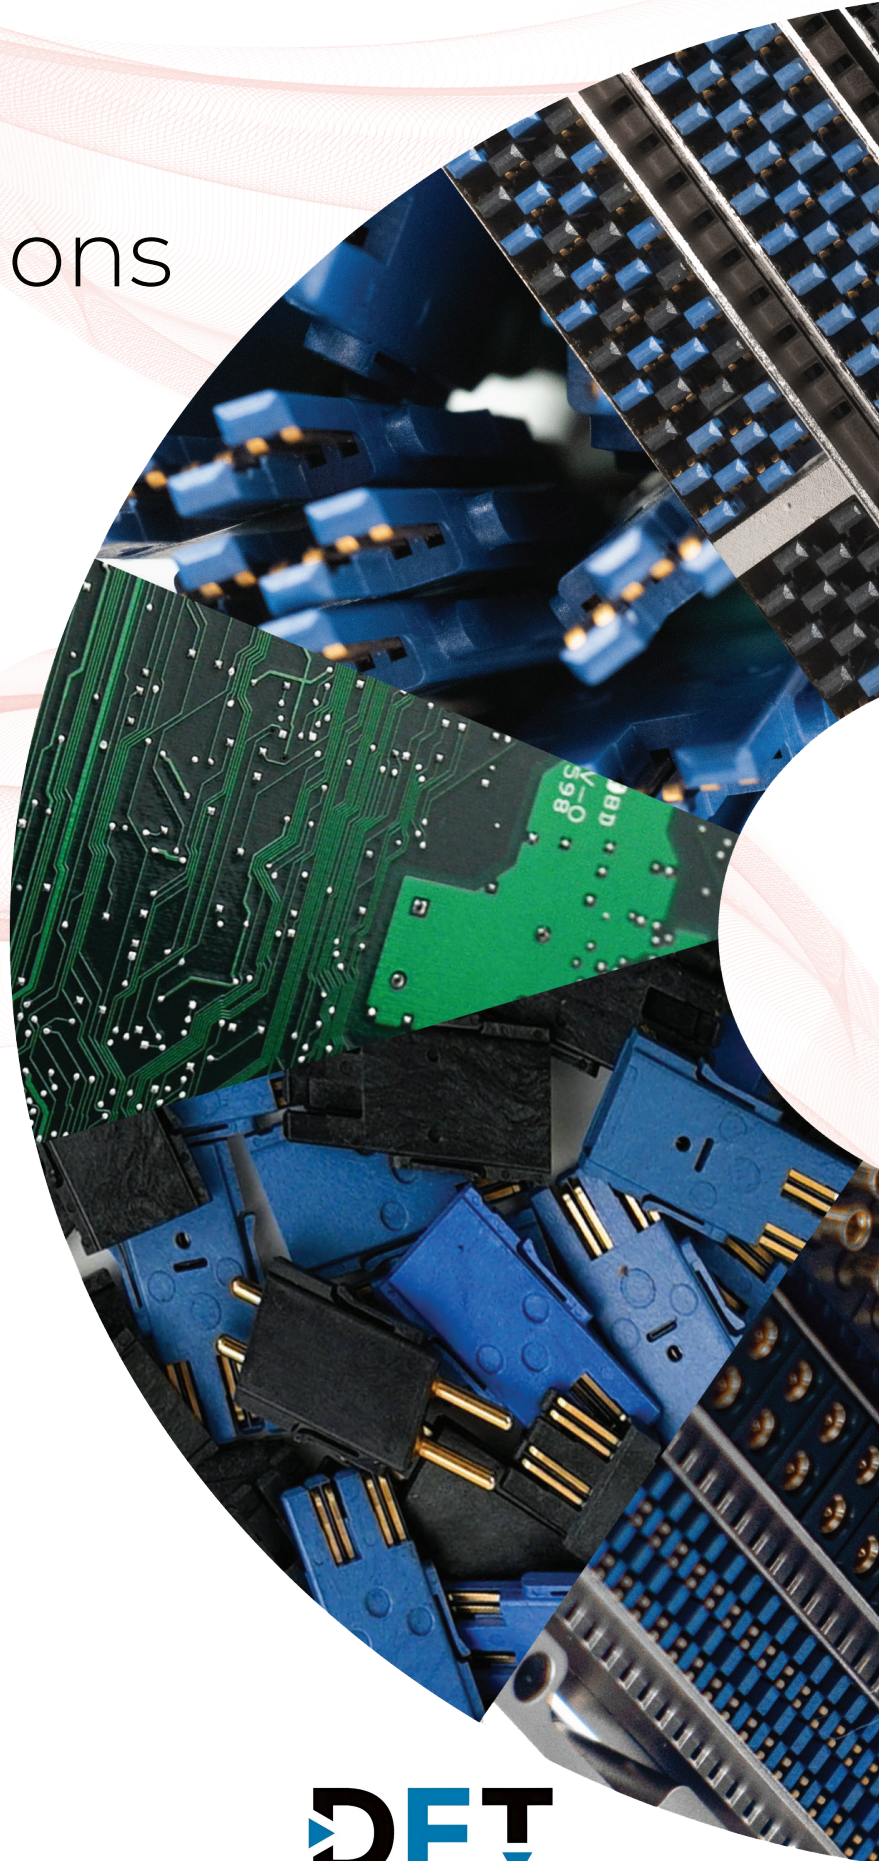

SETTING THE STANDARD

High Speed Data Insert


VPC set the standard for high speed testing with the introduction of the VTAC high speed data insert.



Over
150,000
Mating
Cycles

- Data transfer rate of more than 12.5 Gbps per differential pair
- Cycle life of over 150,000 without signal degradation
- Gold-plated, self-aligning contacts
- Designed to reduce crosstalk
- Increased signal integrity during HSD transfers

*See back cover for full list of specifications

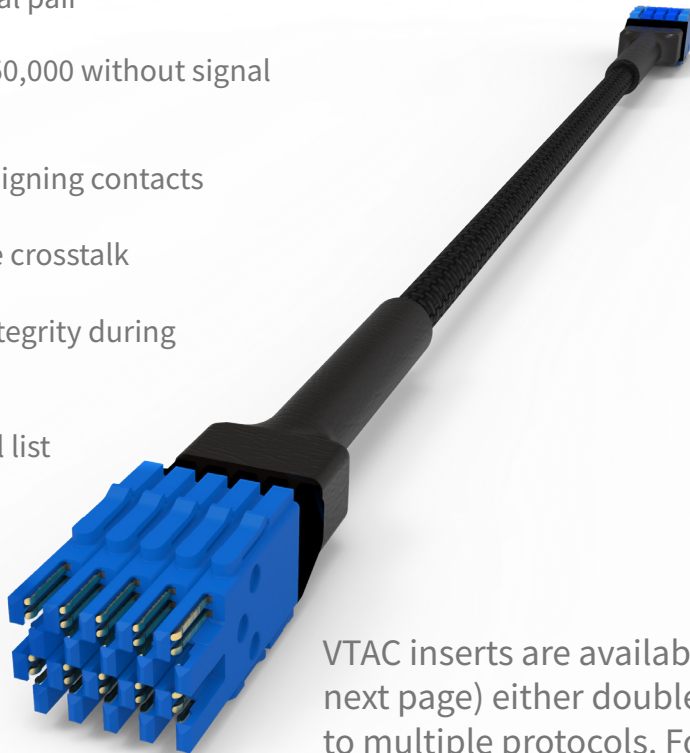

VTAC inserts are available as patchcords (see next page) either double-ended or terminated to multiple protocols. For full list of available protocols, see back cover.



Scan
or click here
to learn more
at vpc.com


Also compatible with VPC's SIM module, i2 MX ITA and Infinity Connector products.

WIRE+ SERVICES


VTAC Patchcords

VPC prides itself on providing customers with a complete interface solution, including wiring. VTAC patchcords are renowned for signal integrity and speed. VTAC's ground-signal scheme and precision-welded design helps reduce signal degradation.

- User-friendly features. No tools needed for assembly
- Used for high bandwidth data transmission and signal integrity testing
- High data capability ensures maximum data rate possible with numerous commercial high speed digital protocols
- Over 150,000 cycle life

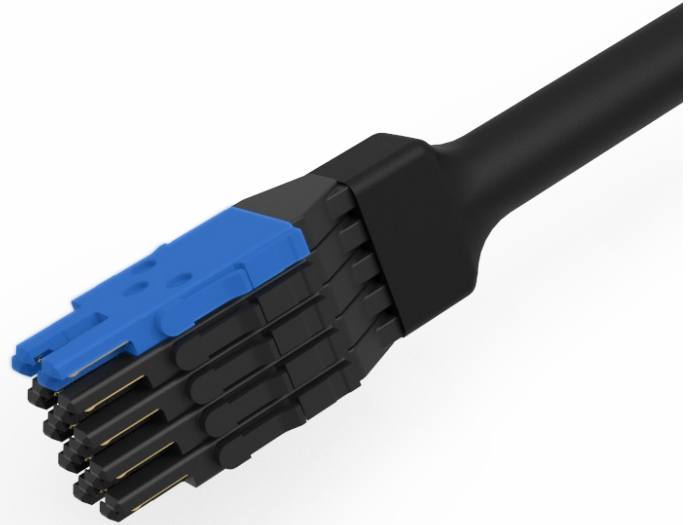

Test-Proven Quality

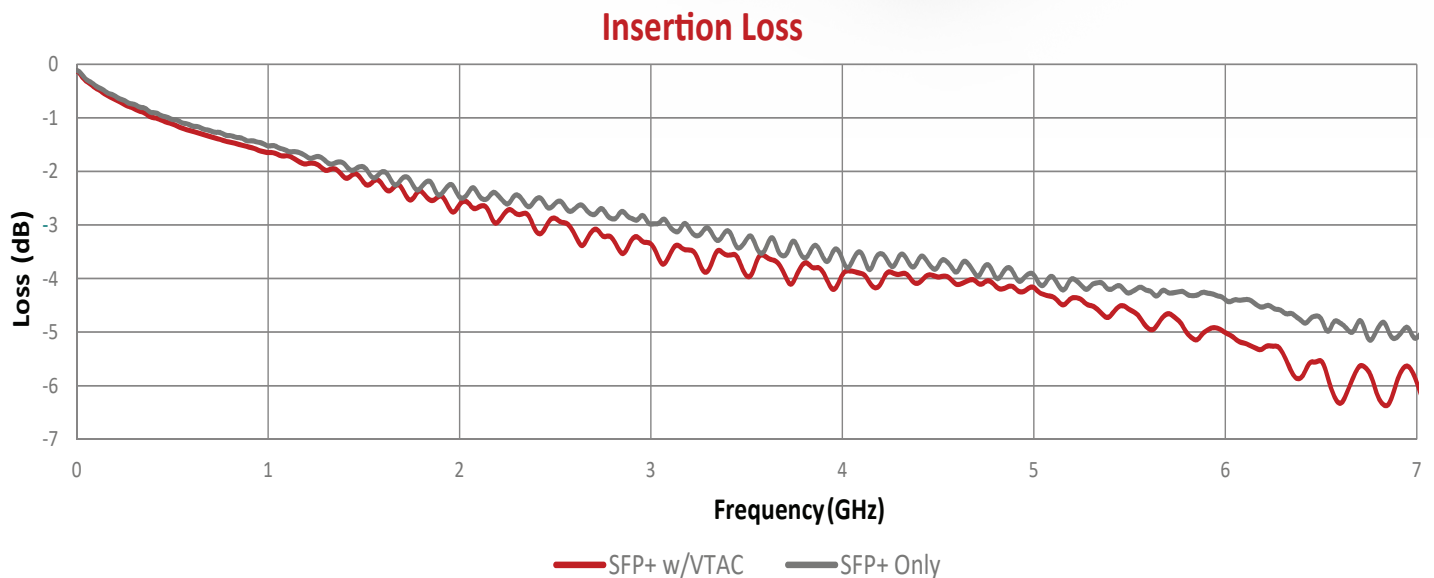

Insertion loss was tested on one-meter long patchcords with SFP+ terminations on either end. The second data line shows the same patchcord that has been bisected and terminated with VTAC connectors in its center.

The results show *no significant deviation* from the SFP signal until approximately 6.25 GHz. Even at 6.25 GHz, there is only -1dB of difference between the two patchcords, which is approximately a 10% loss.

PCB SOLUTIONS



Vertical Header Insert

VTAC vertical header inserts are designed to mount to custom PCBs. They can be configured as a backplane connector and daughterboard connector.




Data rate
12.5 Gbps+/
differential
pair

- Data transfer rate of more than 12.5 Gbps per differential pair
- Makes pass-through connections easy to use
- Gold-plated, self-aligning contacts
- Designed to reduce crosstalk
- Increased signal integrity during HSD transfers
- Replace inserts and cables instead of circuit boards

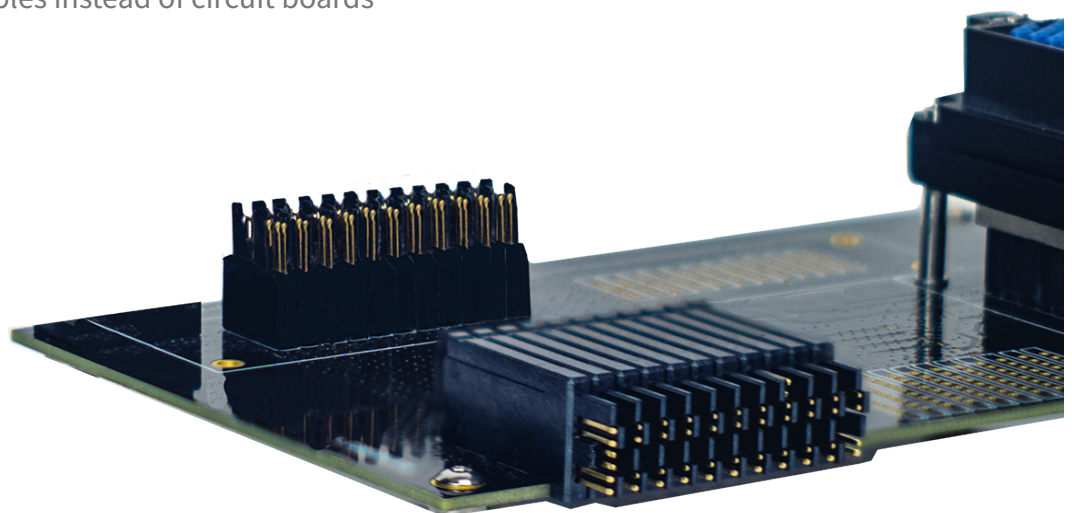

PCB SOLUTIONS

HSD Right Angle Insert



QUALITY/ ECONOMICAL

- Preserves signal integrity at multi-gigabit data rates
- Ideal for projects that require PCB solutions
- Transfers data at 10+ Gbps per differential pair
- COTS-ready, highly serviceable, and modular
- Makes pass-through connections easy to use



COMPATIBLE

- Easily adaptable to pre-existing VTAC applications
- Available as individual inserts or as pre-configured circuit boards
- SIM inserts compatible with 90 Series and iSeries modules
- Compatible with multiple HSD protocols



SERVICEABLE

- Easily replace PCBs without disturbing pass-through inserts
- Replace inserts and cables instead of circuit boards




PCB SOLUTIONS


Infinity Connector

VPC's latest high speed technology allows for concerns about cycle life and lost time due to PCB soldering and changeout to be a thing of the past. Experience "infinite" cycle life with this uniquely designed line of high speed connectors and pass-thru inserts while preserving right angle connections to the PCB.

- Multi-piece design with pass-thru insert to preserve PCB connection
- Available in VTAC, QuadraPaddle, & Micro Power
- VPC's SIM module allows for mixed I/O and 34 positions
- Controlled float design for easier engagement & disengagement

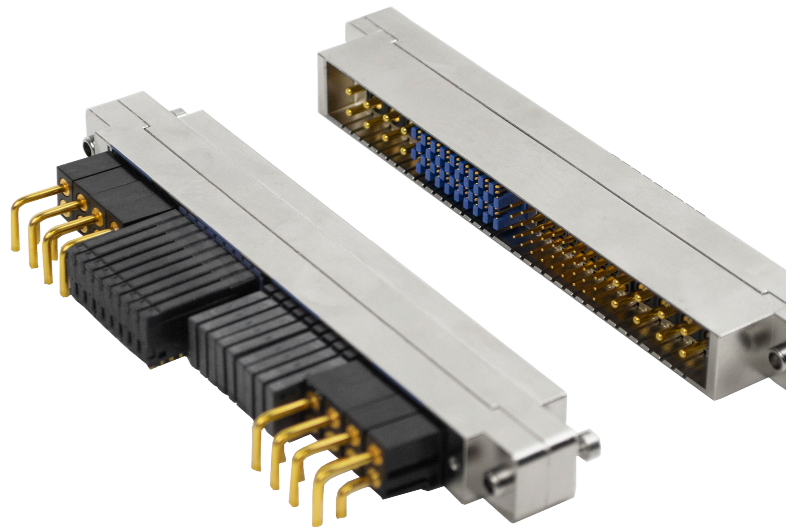


Right Angle PCB Solder Inserts





Pass Thru Inserts





Right Angle PCB Solder Inserts



Micro Power SIM Inserts



QuadraPaddle SIM Inserts



VTAC HSD Right Angle SIM Inserts

PCB Adapters

VTAC Plug-and-Play PCB adapters provide flexibility and modularity where custom PCBs cannot. Mix and match to create a custom solution. Move PCB adapters around to optimize space, mix protocols and match with patchcords.

- Popular high speed protocols including: USB 5 Gbps (USB 3.0, USB 3.1 Gen 1, USB 3.2 Gen 1), Cat 6, SATA, HDMI, DisplayPort, SFP+, 12X InfiniBand and more
- VPC can create a single part number for ordering
- Swap boards in your SIM module solution
- Delivered fully assembled and ready-to-use



VTAC PCB adapters make building a high speed wired ITA enclosure easy and customizable and can be used in any interface that accepts VPC 90 Series modules. VPC Design Engineers can help create a high-speed VTAC solution offering the following benefits:



- Multiple protocols within the same SIM module
- A custom solution that consolidates all high speed data signals
- Easy maintenance with COTS cables
- Transfer speeds greater than 10 Gbps per differential pair
- Configurable interface with high speed alongside coax, signal, power, pneumatic, vacuum and fiber

VTAC

Specifications & Protocols

VTAC is available in patchcords or PCB solutions. While both perform at exceptionally high rates, there is a slight difference in speed applications.

VTAC Insert Specifications

Data Rate 12.5+ Gbps per differential pair

Crosstalk -40 dB min., wired
-30 dB min., right angle
-30 dB min., vertical

Characteristic Impedance 100 +/- 10 Ω per differential pair

Contact Resistance (per mated contact) 30 m Ω max.

Insulation Resistance 1000 M Ω min.

Dielectric Withstanding Voltage 1050 VDC min.

Mating Force 12 oz. max. [0.34 kg] per insert

Insert Material Outer shell is black or blue LCP
Male contact is alloy 7025

Contact Termination Welded

Contact Plating 50 μ " Au over 100 μ " Ni

Protocols Supported*

USB 5 Gbps (USB 3.0, USB 3.1 Gen 1, USB 3.2 Gen 1)

DisplayPort

HDMI

SFP+

Cat 6

SATA

e-SATA

12X InfiniBand

Rosenberger HSD

**Supported protocols are frequently added and updated. For the most up-to-date list contact a Field Application Engineer via the Contact Us option on vpc.com.*



MG-Products B.V.
Rijkevoortsedijk 27A
5447 BD, Rijkevoort (NL)
Phone: +31 (0)485 382 133
www: www.designedfortest.com
E-mail: Info@designedfortest.com

NORTH & SOUTH AMERICA
1400 New Hope Road
Waynesboro, VA 22980
United States
Phone +1 540 932 3300
info@vpc.com